




1. Place the Soft Close plate into the top track ensuring the individual peg is facing the door



2. Close the door fully. This will push the soft close plate into the correct position within the track. If the plate does not meet the soft close on the door, adjust the door height using the adjustment screws at the bottom of the door.

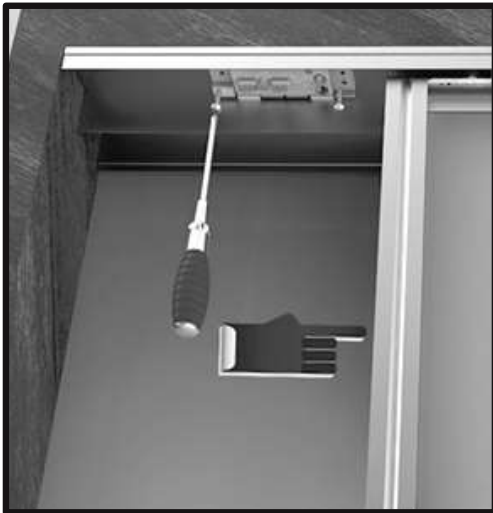

3. Open the door and screw the plate securely in place

4. Fine height adjustments can be made using the adjustment screw in the centre of the plate

